


MODEL NO: _____
 TYPE: _____
 PROJECT: _____
 COMMENTS: _____

UNINTERRUPTIBLE 350W LOAD CAPABILITY

Operates
HID
INCANDESCENT
LED
FLUORESCENT FIXTURES

FEATURES

- UL 924 Listed
- 
- Uninterruptible sine wave output
 - Operates HID, incandescent, LED, and fluorescent fixtures
 - Emergency lighting supplied from one convenient source
 - Includes momentary contact test switch, yellow ready indicator, green inverter-on indicator, and red alarm indicator
 - Valve Regulated Lead Acid (VRLA) battery provides long-life and is maintenance free
 - Line voltage allows for remote mounting of emergency fixtures at distances up to 1000 feet
 - Low Battery Voltage Disconnect
 - Line Latch Protection
 - Electronic overload protection
 - Meets or exceeds all National Electrical Code and Life Safety Code Emergency Lighting Requirements
 - Durable surface mount design with white semi-gloss powder-coat finish
 - 3/7 Pro-Rata Warranty

DESCRIPTION

The IOTA **Uninterruptible IIS-350-U** is a UL Listed stand-alone sine wave output inverter designed to provide power to designated emergency lighting fixtures. In a power loss situation, the IOTA **IIS-350-U** will supply **350W** of power from the onboard battery supply. The double-conversion design of the **IIS-350-U** delivers power with no interruption to the load, allowing 'no-break' operation of HID, incandescent, LED, and fluorescent lamp and ballast combinations. The **IIS-350-U** is available in a surface mount housing and comes with a three-year warranty and seven-year pro rata battery warranty.

LOAD CAPABILITY

350W

LAMPS OPERATED

HID
 Incandescent
 LED
 Fluorescent lamps and ballast combinations

COMPONENTS

High-efficiency pure sine wave inverter
 Switch-mode charger provides filtered and regulated output to battery and inverter
 12V oversized Valve Regulated Lead Acid (VRLA) battery

CONSTRUCTION

16-gauge steel housing
 Surface mount design

DIMENSIONS AND WEIGHT

IIS-350-U and IIS-350-UM	
23" x 17.83" x 8.2"	116 lbs

IOTA

ENGINEERING

P.O. BOX 11846 TUCSON, AZ 85734
 (520) 294-3292 • FAX (520) 741-2837

www.iotaengineering.com

IIS-350-U

UNINTERRUPTIBLE 350W INVERTER UNIT EQUIPMENT


RATINGS AND SPECIFICATIONS

RATINGS
Input: 120 Volts, 60 Hz 535 Watts at .65 lagging power factor (float charge) 750 Watts at .65 lagging power factor (bulk charge)
Output (IIS-350-U): 120 Volts, 60 Hz, 350 Watts at .9 leading to .9 lagging PF
Output (IIS-350-UM): 120/208/240/277 Volts, 60 Hz, 350 Watts at .9 leading to .9 lagging PF

SPECIFICATIONS
Transfer Time: Uninterruptible (no transfer time)
Voltage Regulation: +/- 2% @ 15% to 110% load
Frequency Regulation: +/- .5%
Load Power Factor Range: .9 leading to .9 lagging
Operating Temperature: 20° to 30°C (68° to 86°F)

ORDERING GUIDE

The IOTA IIS-350-U is available in two models (IIS-350-U and IIS-350-UM) for use with various load voltages.

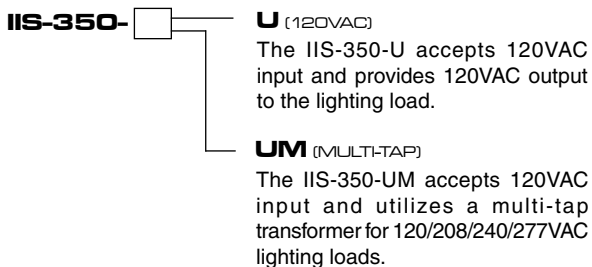

SPECIFICATION SAMPLE

Emergency lighting shall be provided by inverter unit equipment designed to operate designated HID, incandescent, fluorescent and LED fixtures on emergency power at their full nominal lumen rating during the full 90 minutes emergency discharge cycle. System output will be rated at 350 watts for 90 minutes and provide an electronically fused output connection to the load. The system's voltage rating shall be factory-supplied 120 VAC input/output (model -U) or 120 VAC input with 120/208/240/277 VAC output (model -UM).

The inverter unit shall allow for connected emergency fixture(s) to be normally on. Upon utility power loss, the inverter unit shall deliver 100% of its full rated output with no break in illumination, and will provide power to emergency fixtures at distances of up to 1000 feet.

The housing shall be designed for surface mount installation requirements and manufactured using 16-gauge steel with a white hammer semi-gloss scratch-resistant baked-on powder coat paint finish.

The unit's electronics shall include a self-contained inverter section with a fully automatic, thermal-compensating variable-rate battery charger, AC lockout feature, low battery voltage disconnect, DC overload, short circuit and brownout protection as standard. The unit shall utilize a sealed lead calcium battery with a 10-year design life. The inverter system shall be UL 924 Listed and labeled. The unit shall be covered under a 3-year warranty on the electronics and battery and a 7-year pro-rata warranty on the battery. It shall meet or exceed the requirements of UL 924, NFPA 101 Life Safety Code, NFPA 70 National Electrical Code, OSHA and State and Local codes.

The inverter unit shall be IOTA Engineering model IIS-350-U or UM.



WARRANTY

All IOTA products receive 100% quality inspection before shipment to insure proper and satisfactory operation. When operated under normal conditions, IOTA inverter products will provide years of dependable service. This unit is backed by a 3/7 year warranty. The unit is covered by a complete 3-year warranty against defects in material or workmanship, and a 7-year pro-rata battery warranty.